

Instructions for Kit No BK101 - 1/24 Garden shed

This is a kit for a typical 8ft x 6ft tongue and groove garden shed with end door and side window.


Contents of the kit:

Ref	Description	Qty
1	floor assembly	1
2	Strips for underfloor battens 2.5mm x 2mm	5
3	rear wall (chamfered top edge)	1
4	front wall with window opening (chamfered top edge)	1
5	end wall	1
6	end wall with door opening	1
7	Square strip for corners 1.5mm x 1.5mm	4
8	Roof panels (mitred to fit together)	2
9	roof trusses	2
10	barge boards	2
11	Diamond shaped pieces for the roof peak	1
12	door/frame assembly	1
13	window assembly	1
14	window outer facing	1
15	glazing	3



To complete the kit you will need glue, paint or stain, medium grade sandpaper (to represent the roof felt) and a door handle.

We recommend the use of Aliphatic Resin and a pin point applicator for assembly of this kit.

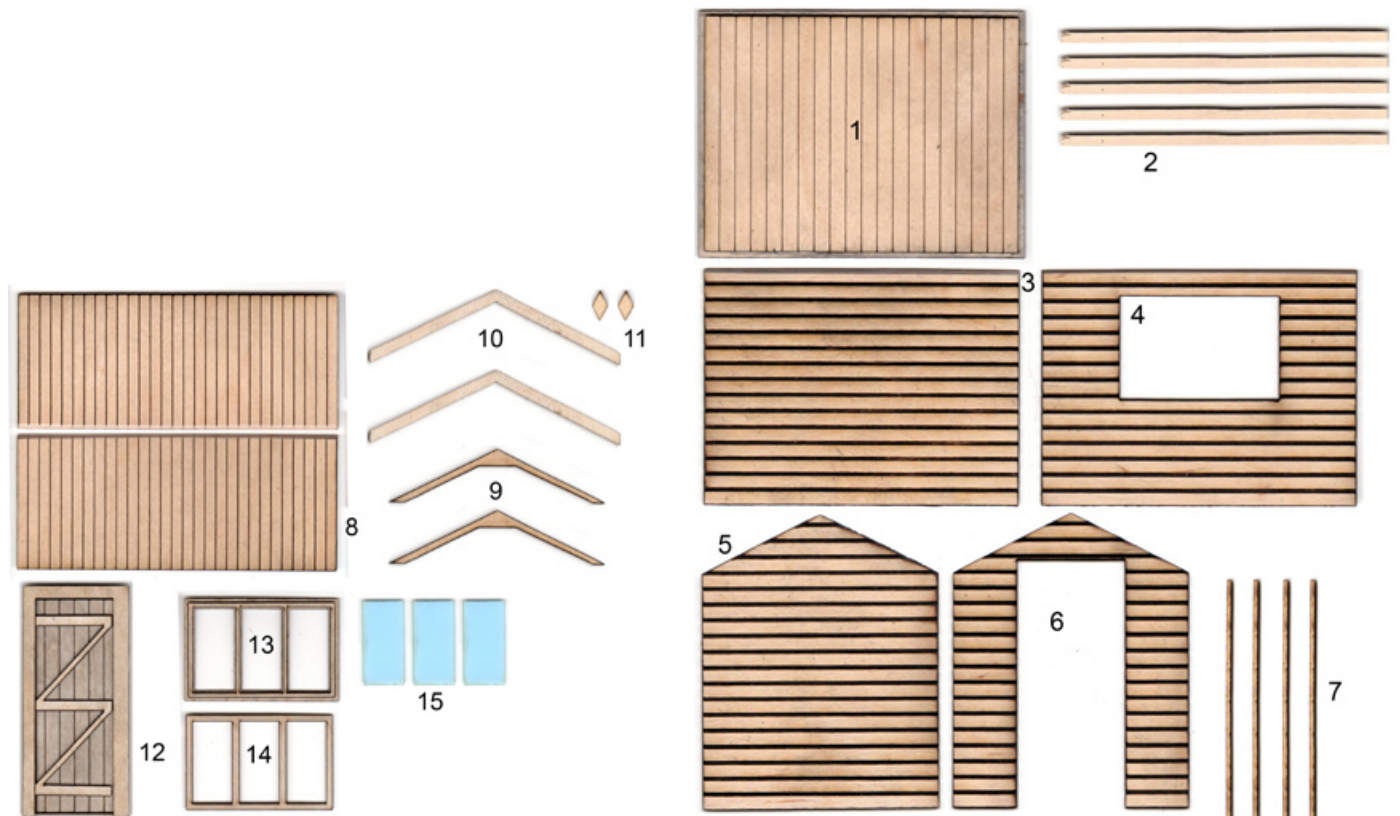

Assembly

1. It is recommended to paint or stain the parts before assembly.
2. Remove the covering from the glazing material (15) and insert the glazing into the window frame (13). Then glue the outer facing (14) onto the window and glue the frame into the window opening in the front wall (4) from the inside.
3. Glue the door frame assembly (12) into the door opening in the end wall (6) from the inside (so that the door opens outwards).
4. Glue the 5 battens (2) under the floor (1) spaced equally across the bottom of the floor.
5. Glue a 1.5mm x 1.5mm square strip (7) to each end of the front and back walls (3 & 4) and trim to match the top of the wall (which is chamfered to accommodate the roof).
6. Glue the back wall (3) onto the ledge at the edge of the floor (1). Ensure it is square to the floor.
7. Glue one end wall (5) onto the ledge of the floor and to the back wall.
8. Glue the other end wall (6) in place.
9. Glue the front wall (4) in place.
10. Mark on the roof pieces (8) where the inside of the end walls will be and glue the two roof trusses (9) to one half of the roof at the places marked so that they fit inside the end walls. Make sure the mitred edge of the roof section is to the top.
11. Glue the other half of the roof to the trusses.
12. Cover the roof in a suitable material to represent the felt covering (a medium grade sandpaper painted an appropriate colour is quite effective).
13. Glue the barge boards (10) and diamond peak decorations (11) onto each end of the roof.
14. The roof can be left loose or fixed, as required.
15. Dummy hinges, a lock, etc can be made from card and added to the door.
16. Finally the shed can be weathered, if required, with thin washes of acrylic paint.

